




Cap Screws

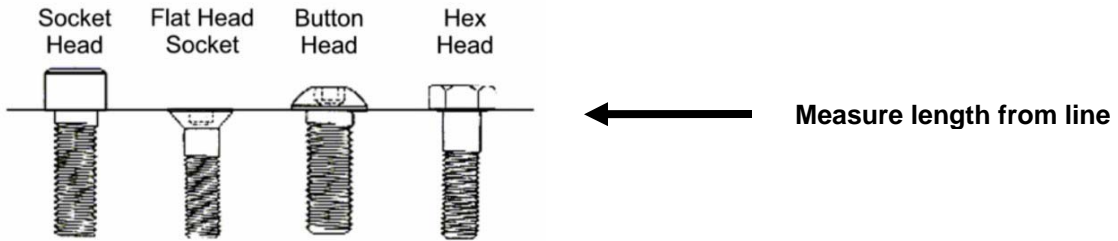

Sheet Metal Screws

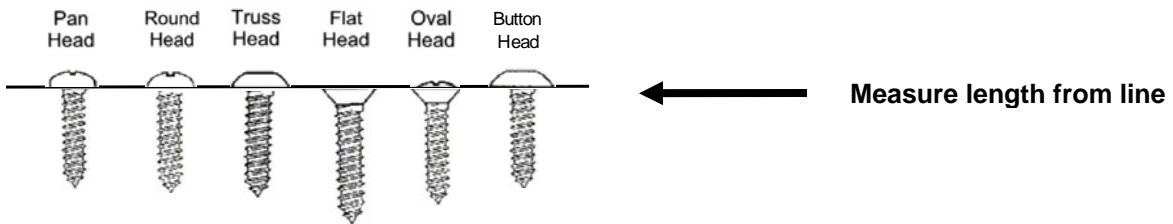

Machine Screws

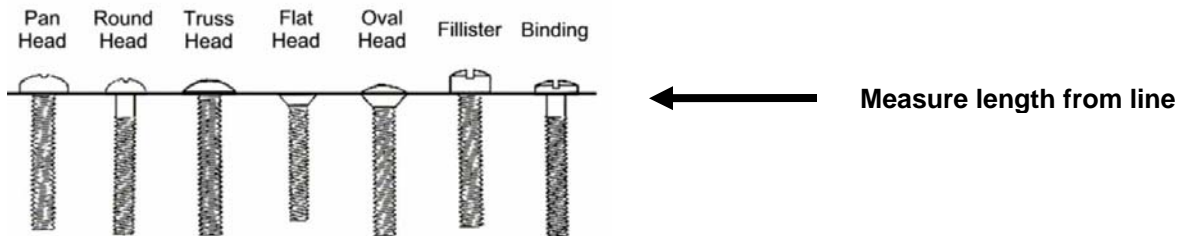

*****PLEASE NOTE*****

ALL TORQUE VALUES CHANGE WHEN USING STAINLESS STEEL!
 ALWAYS USE A LUBRICANT FOR STAINLESS STEEL APPLICATIONS
 (we recommend 'Anti-Seize' or 'Blue Loc-Tite')

TORQUE VALUES ARE SIGNIFICANTLY REDUCED WHEN USING ANTI-SEIZE OR LOC-TITE BECAUSE THESE COMPOUNDS REDUCE FRICTION

TIGHTENING TORQUE IN FOOT POUNDS

	1/4-20	1/4-28	5/16-18	5/16-24	3/8-16	3/8-24	7/16-14	7/16-20	1/2-13
Standard	5	6	11	13	18	20	28	29	39
ARP	9		19		33		57		
	M4-.7	M5-.8	M6-1.0	M8-1.25	M10-1.50	M12-1.75			
Standard	1.3	2.5	4.4	10.7	22	37			